

*Kentseel Sokah*

A Y D I N L A T M A



# STARK



**Housing**

Aluminium injection with electrostatic powder coating and air valve (ventile), monoblok silikon gasket

**Optics**

Special design, clear, acrylic (PMMA) optic lens

**Glass**

4mm clear tempered glass


**LED**

High-power LED with high efficacy

**Driver**



Constant current driver with high efficiency

**Ambient Temperature**





Type	Type Code	CCT(K)	Light Output (lm)	CRI	Power (w)	V/Hz	Weight
B 0550 STA	BSTA.550.48.40.L1	4000	7710	Ra>70	48	220-240/50-60	8,5kg
	BSTA.550.48.40.L2	4000	7750	Ra>70	48	220-240/50-60	8,5kg
	BSTA.550.48.40.L3	4000	7780	Ra>70	48	220-240/50-60	8,5kg
	BSTA.550.48.40.L4	4000	7850	Ra>70	48	220-240/50-60	8,5kg
	BSTA.550.58.40.L1	4000	8980	Ra>70	58	220-240/50-60	8,5kg
	BSTA.550.58.40.L2	4000	9000	Ra>70	58	220-240/50-60	8,5kg
	BSTA.550.58.40.L3	4000	9150	Ra>70	58	220-240/50-60	8,5kg
	BSTA.550.58.40.L4	4000	9180	Ra>70	58	220-240/50-60	8,5kg
	BSTA.550.69.40.L1	4000	10360	Ra>70	69	220-240/50-60	8,5kg
	BSTA.550.69.40.L2	4000	10680	Ra>70	69	220-240/50-60	8,5kg
	BSTA.550.69.40.L3	4000	10580	Ra>70	69	220-240/50-60	8,5kg
	BSTA.550.69.40.L4	4000	10460	Ra>70	69	220-240/50-60	8,5kg
	BSTA.550.105.40.L1	4000	15970	Ra>70	105	220-240/50-60	8,5kg
	BSTA.550.105.40.L2	4000	15980	Ra>70	105	220-240/50-60	8,5kg
	BSTA.550.105.40.L3	4000	16010	Ra>70	105	220-240/50-60	8,5kg
	BSTA.550.105.40.L4	4000	15960	Ra>70	105	220-240/50-60	8,5kg

Type	Type Code	CCT(K)	Light Output (lm)	CRI	Power (w)	V/Hz	Weight
	BSTA.550.140.40.L1	4000	19730	Ra>70	140	220-240/50-60	9kg
	BSTA.550.140.40.L2	4000	19560	Ra>70	140	220-240/50-60	9kg
	BSTA.550.140.40.L3	4000	19750	Ra>70	140	220-240/50-60	9kg
	BSTA.550.140.40.L4	4000	19440	Ra>70	140	220-240/50-60	9kg

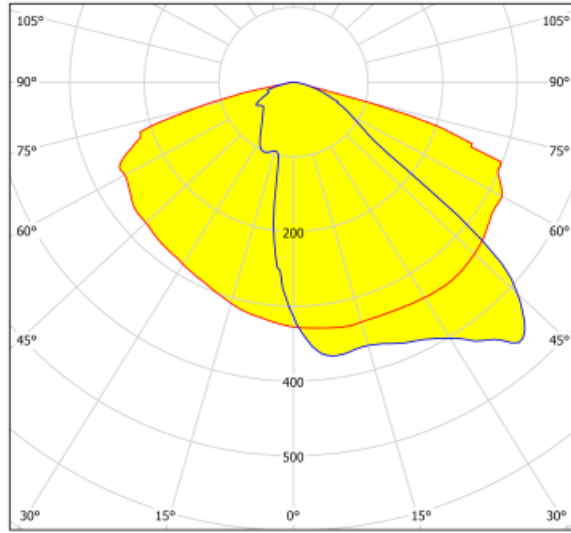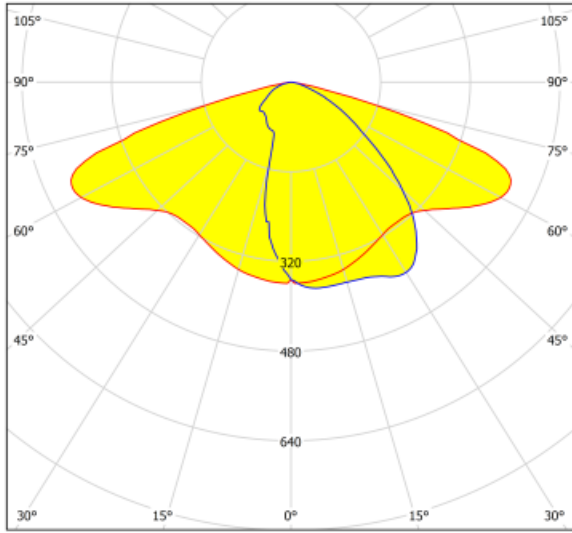

cd/klm  $\eta = 100\%$   
 — C0 - C180 — C90 - C270

cd/klm  $\eta = 100\%$   
 — C0 - C180 — C90 - C270

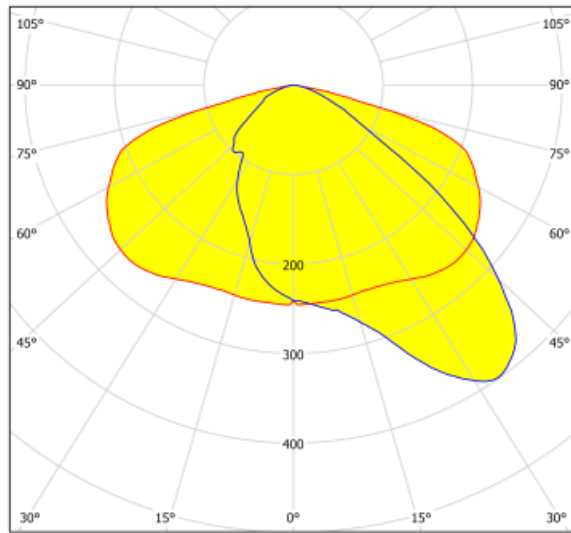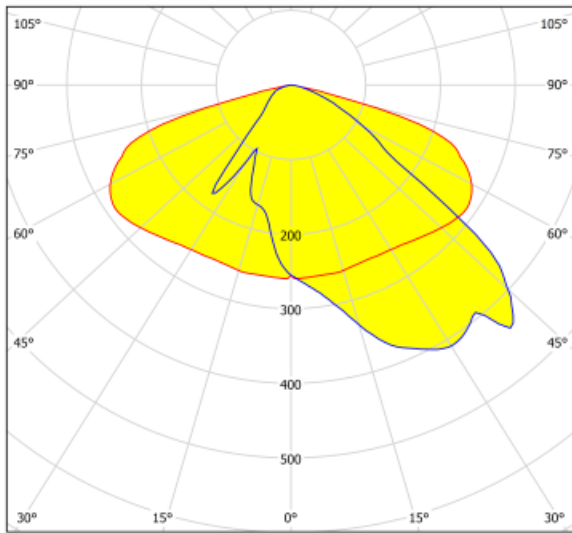

cd/klm  $\eta = 100\%$   
 — C0 - C180 — C90 - C270

cd/klm  $\eta = 100\%$   
 — C0 - C180 — C90 - C270

