




Strio-LL Opal

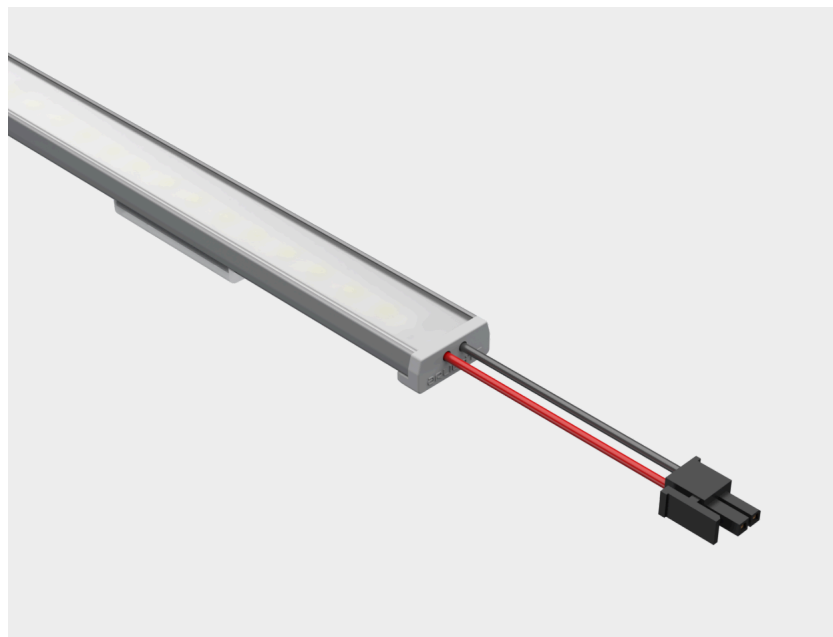

Housing

Matt natural anodized, aluminum extrusion profile and mounting accessories with plastic end cap

Diffuser

Opal, white, diffusing polycarbonate diffuser with lambertian light distribution

Led

High-efficacy mid power LED, achieving L70B50 \geq 50,000 hours of lifetime

Driver

24V external type. Constant voltage output driver with high efficiency

| Type Code | Power (w) | CCT (K) | Light Output (lm) | CRI | V/Hz | L (mm) |
|------------------|-----------|---------|-------------------|-----|--------|--------|
| SDSRL0140.1,5.40 | 1,5 | 4000 | 133 | >80 | 24V DC | 140 |
| SDSRL0140.1,5.30 | 1,5 | 3000 | 130 | >80 | 24V DC | 140 |
| SDSRL.0264.3.40 | 3 | 4000 | 268 | >80 | 24V DC | 264 |
| SDSRL.0264.3.30 | 3 | 3000 | 262 | >80 | 24V DC | 264 |
| SDSRL.0511.7.40 | 7 | 4000 | 535 | >80 | 24V DC | 511 |
| SDSRL.0511.7.30 | 7 | 3000 | 524 | >80 | 24V DC | 511 |
| SDSRL.1005.13.40 | 13 | 4000 | 1088 | >80 | 24V DC | 1005 |
| SDSRL.1005.13.30 | 13 | 3000 | 1066 | >80 | 24V DC | 1055 |
| SDSRL.1252.16.40 | 16 | 4000 | 1389 | >80 | 24V DC | 1252 |
| SDSRL.1252.16.30 | 16 | 3000 | 1361 | >80 | 24V DC | 1252 |
| SDSRL.1499.20.40 | 20 | 4000 | 1694 | >80 | 24V DC | 1499 |
| SDSRL.1499.20.30 | 20 | 3000 | 1660 | >80 | 24V DC | 1499 |

