




## Strio-LL Frosted

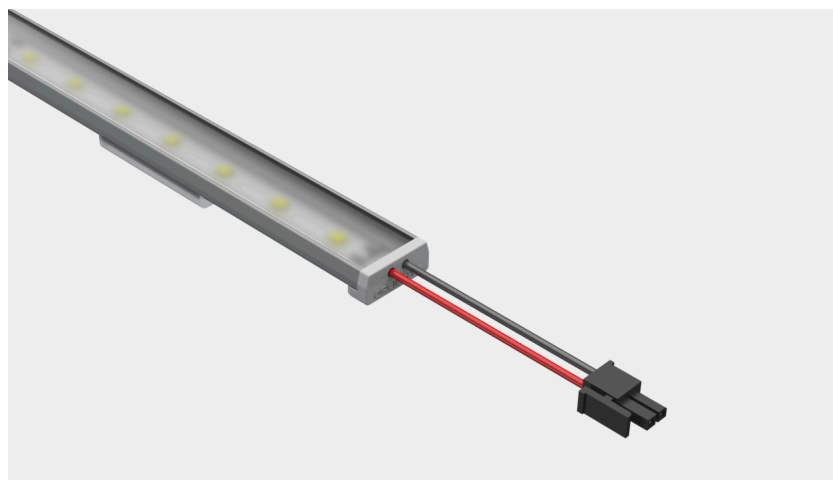

### Housing

Matt natural anodized, aluminum extrusion profile and mounting accessories with plastic end cap

### Diffuser

Opal, white, diffusing polycarbonate diffuser with lambertian light distribution

### Led

High-efficacy mid power LED, achieving L70B50 ≥ 50,000 hours of lifetime

### Driver

24V external type. Constant voltage output driver with high efficiency

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	L (mm)
SDSRLB0140.1,5.40	1,5	4000	162	>80	24V DC	140
SDSRLB0140.1,5.30	1,5	3000	159	>80	24V DC	140
SDSRLB.0264.3.40	3	4000	322	>80	24V DC	264
SDSRLB.0264.3.30	3	3000	315	>80	24V DC	264
SDSRLB.0511.7.40	7	4000	641	>80	24V DC	511
SDSRLB.0511.7.30	7	3000	628	>80	24V DC	511
SDSRLB.1005.13.40	13	4000	1305	>80	24V DC	1005
SDSRLB.1005.13.30	13	3000	1279	>80	24V DC	1055
SDSRLB.1252.16.40	16	4000	1667	>80	24V DC	1252
SDSRLB.1252.16.30	16	3000	1634	>80	24V DC	1252
SDSRLB.1499.20.40	20	4000	2048	>80	24V DC	1499
SDSRLB.1499.20.30	20	3000	2007	>80	24V DC	1499

