




# PLUS GRID-2

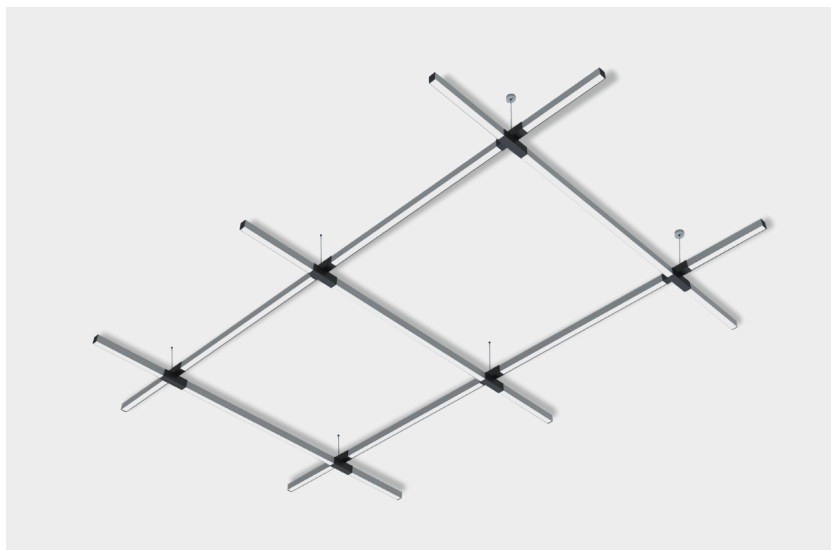

## Housing

Matte natural anodized, aluminum extrusion profile and stainless steel mounting accessories with plastic ceiling cup.

## Optics

Opal, white, diffusing polycarbonate lens with lambertian light distribution.

## Led

High-efficacy mid power LED with CRI>80, achieving L90B50  $\geq$  50,000 hours of lifetime.

## Driver

Constant current output LED driver with high efficiency and  $Pf \geq 0.95$

## Options

Dimming via DALI

## Color

Matte natural anodized

| Type Code        | Power (w) | CCT (K) | Light Output (lm) | CRI | V/Hz                | Weight (Kg) |
|------------------|-----------|---------|-------------------|-----|---------------------|-------------|
| SPLG.3045.633.30 | 633       | 3000    | 57720             | >80 | 220 - 240 / 50 - 60 | 28          |
| SPLG.3045.633.40 | 633       | 4000    | 60770             | >80 | 220 - 240 / 50 - 60 | 28          |

