




# PLUS GRID-4

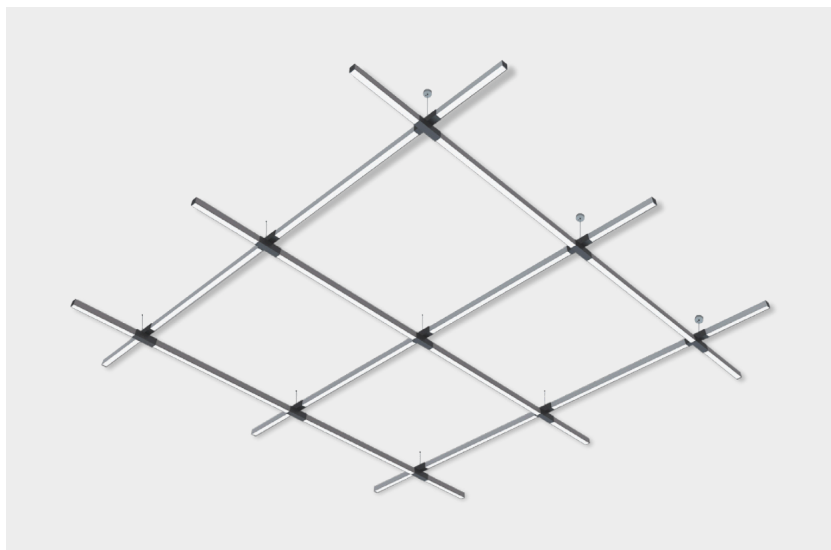

## Housing

Matte natural anodized, aluminum extrusion profile and stainless steel mounting accessories with plastic ceiling cup.

## Optics

Opal, white, diffusing polycarbonate lens with lambertian light distribution.

## Led

High-efficacy mid power LED with CRI>80, achieving L90B50  $\geq$  50,000 hours of lifetime.

## Driver

Constant current output LED driver with high efficiency and  $Pf \geq 0.95$

## Options

Dimming via DALI

## Color

Matte natural anodized

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	Weight (Kg)
SPLG. 4545.1104.30	1104	3000	90710	>80	220 - 240 / 50 - 60	43,2
SPLG. 4545.1104.40	1104	4000	96500	>80	220 - 240 / 50 - 60	43,2

