




# DG 1020 MGC

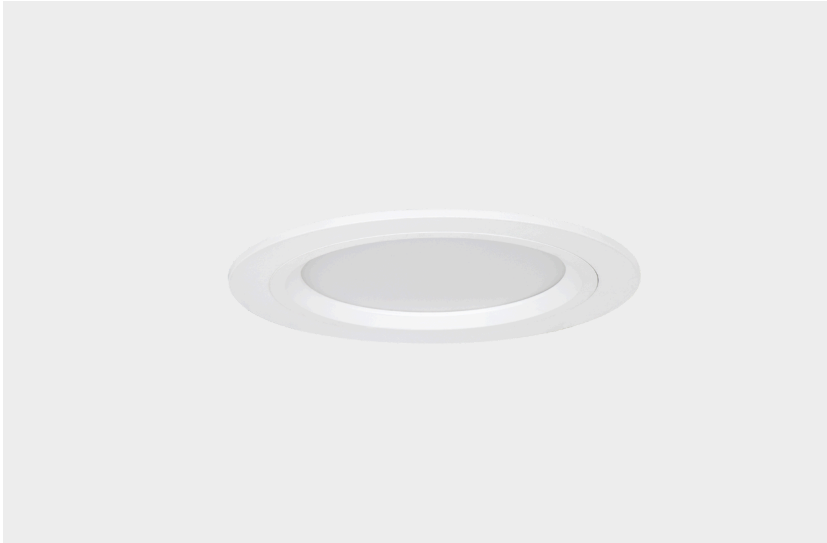

## Housing

Aluminum injection frame with electrostatic powder coating and die-cast aluminum heatsink.

**Optics** Opal white polystyrene diffuser with lambertian light distribution.

**Led** High-efficacy LED module with CRI>80, achieving L90B50 ≥ 50,000 hours of lifetime.

**Driver** Constant current output LED driver with high efficiency and pf >0,9.

**Operating Temperature Range** 0 °C/+35 °C

## Options

- \* 1 or 3 hours emergency lighting kit
- \* Dimming via DALI



Ral 9016

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	Weight (Kg)	Cut-out Size (mm)
DGMGC.200.13.30	13	3000	925	>80	220 - 240 / 50 - 60	0,85	Ø175
DGMGC.200.13.40	13	4000	1000	>80	220 - 240 / 50 - 60	0,85	Ø175

