




## DG 2016 KLD

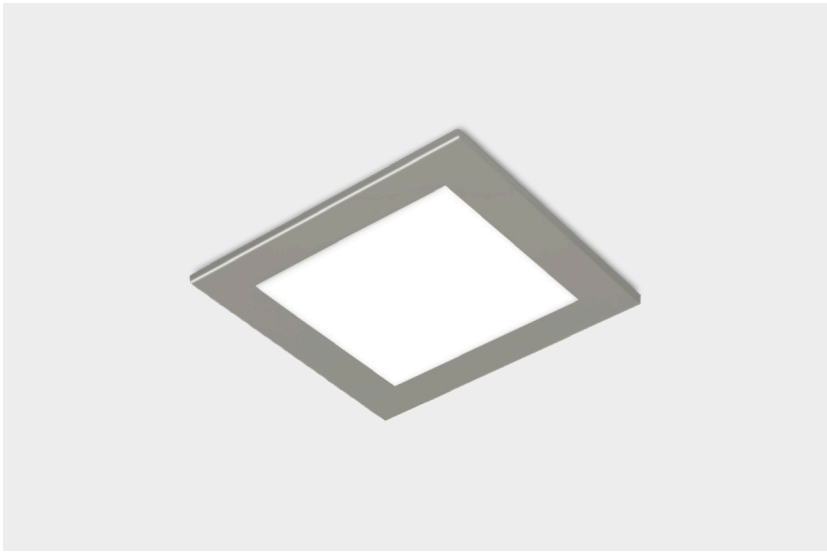

### Housing

Sheet steel with electrostatic powder coating.

**Optics** Opal white polystyrene diffuser with lambertian light distribution.

### Led

High-efficacy LED module with CRI>80, achieving L90B50  $\geq$  50,000 hours of lifetime.

### Driver

Constant current output LED driver with high efficiency and pf >0,9.

### Options

- \* 1 or 3 hours emergency lighting kit
- \* Dimming via DALI



Ral 9016 Ral 9005 Ral 9006

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	Weight (Kg)	Cut-out Size (mm)
DGKLD.1616.13.30	13	3000	660	>80	220 - 240 / 50 - 60	0,7	140x140
DGKLD.1616.13.40	13	4000	720	>80	220 - 240 / 50 - 60	0,7	140x140

