




DS 2011 SAK

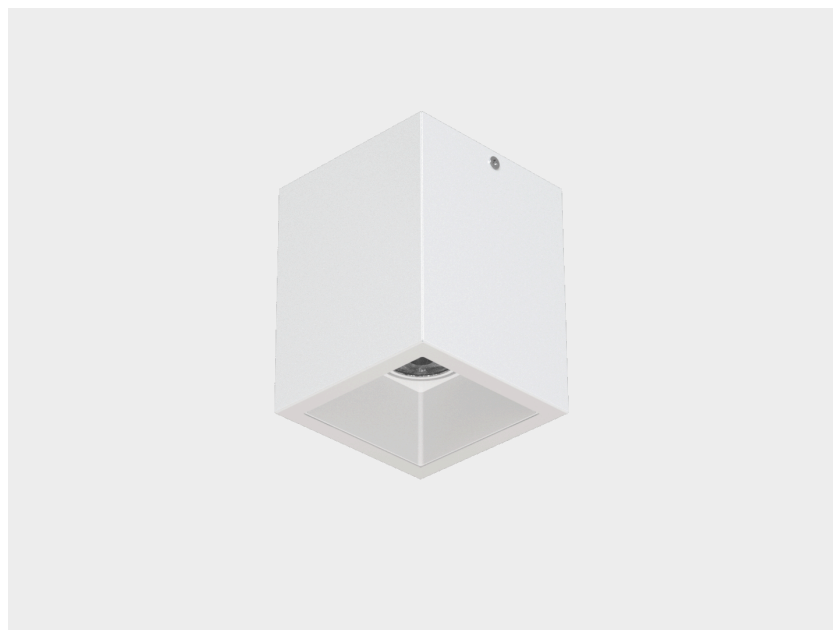

Housing

Electrostatic powder coated steel body, aluminum injection inner body and die-cast aluminum heatsink.

Optics

Highly efficient PMMA lens, designed specially for High Power LED.

Led

High-efficacy High Power LED with CRI>80, achieving L70B50 ≥ 50,000 hours of lifetime.

Driver


Constant current output LED driver with high efficiency and pf >0,8.

Options Dimming via DALI




Ral 9016 Ral 9005


| Type Code | Power (w) | CCT (K) | Light Output (lm) | CRI | V/Hz | Weight (Kg) | Beam Angle |
|------------------------|-----------|---------|-------------------|-----|---------------------|-------------|------------|
| DSSAK. 110.8.30.25 | 8 | 3000 | 660 | >80 | 220 - 240 / 50 - 60 | 1 | 25° |
| DSSAK. 110.8.40.25 | 8 | 4000 | 700 | >80 | 220 - 240 / 50 - 60 | 1 | 25° |
| DSSAK. 110.8.30.35 | 8 | 3000 | 660 | >80 | 220 - 240 / 50 - 60 | 1 | 35° |
| DSSAK. 110.8.40.35 | 8 | 4000 | 740 | >80 | 220 - 240 / 50 - 60 | 1 | 35° |
| DSSAK. 110.8.30.60 | 8 | 3000 | 620 | >80 | 220 - 240 / 50 - 60 | 1 | 60° |
| DSSAK. 110.8.40.60 | 8 | 4000 | 690 | >80 | 220 - 240 / 50 - 60 | 1 | 60° |
| DSSAK. 110.11.30.25 | 11 | 3000 | 880 | >80 | 220 - 240 / 50 - 60 | 1 | 25° |
| DSSAK. 110.11.40.25 | 11 | 4000 | 970 | >80 | 220 - 240 / 50 - 60 | 1 | 25° |
| DSSAK. 110.11.30.35 | 11 | 3000 | 860 | >80 | 220 - 240 / 50 - 60 | 1 | 35° |
| DSSAK. 110.11.40.35 | 11 | 4000 | 955 | >80 | 220 - 240 / 50 - 60 | 1 | 35° |
| DSSAK. 110.11.30.60 | 11 | 3000 | 820 | >80 | 220 - 240 / 50 - 60 | 1 | 60° |
| DSSAK. 110.11.40.60 | 11 | 4000 | 910 | >80 | 220 - 240 / 50 - 60 | 1 | 60° |

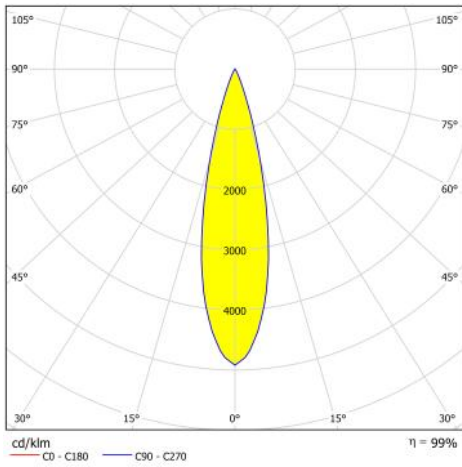

DSSAK.110.11.40.25

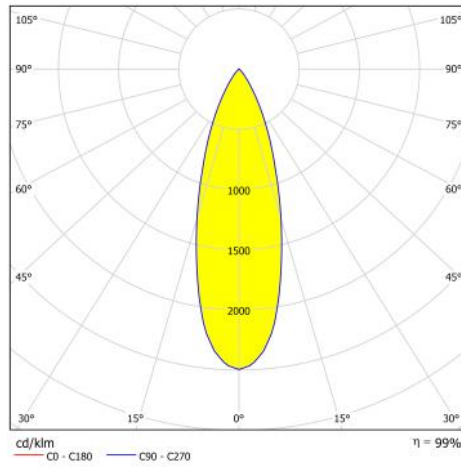

DGMOT.160.27.40.40

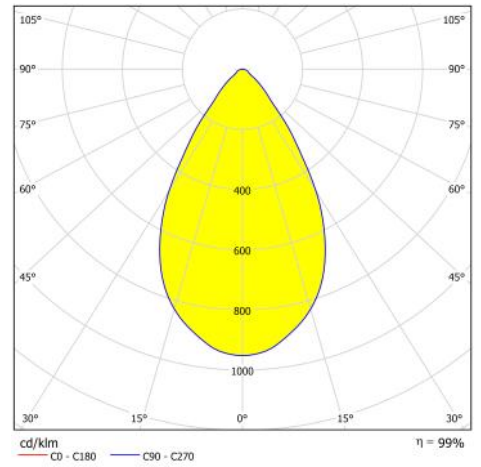

DSSAK.110.11.40.60

