




G 6060 MPL

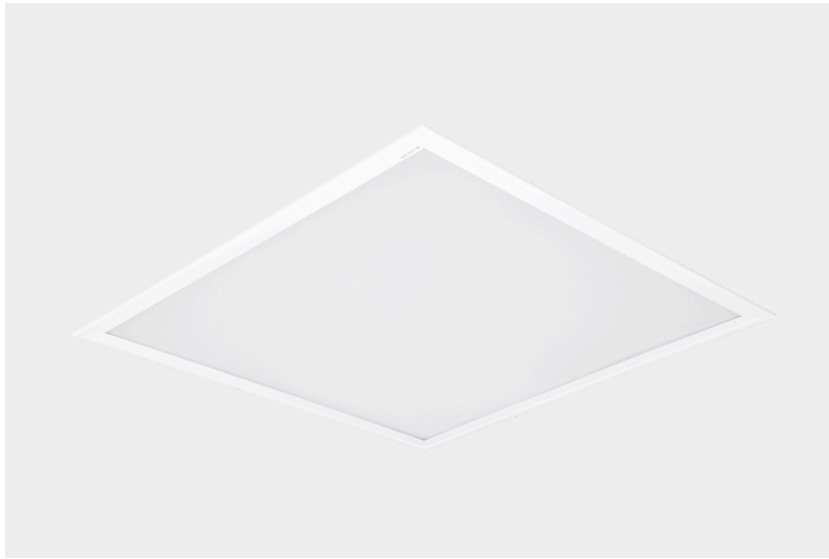

Housing

Sheet steel body with electrostatic powder coating.

Optics

Prismatic structured opal white diffuser with lambertian light distribution and high transmissivity.

LED High-efficiency LED with CRI>80, achieving L90B50 ≥ 50,000 hours of lifetime.

Driver

Constant current output LED driver with high efficiency and Pf≥0.95

UGR (Glare) 36W : (4H-8H 70/50/20) <19,2
28W : (4H-8H 70/50/20) <19

Options

1 or 3 hours emergency lighting kit
Dimming via DALI



Ral 9016 Ral 9006

| Type Code | Power (w) | CCT (K) | Light Output (lm) | CRI | V/Hz | Weight (Kg) | Cut-out Size (mm) |
|-----------------|-----------|---------|-------------------|-----|---------------------|-------------|-------------------|
| GMPL.6060.36.30 | 36 | 3000 | 3280 | >80 | 220 - 240 / 50 - 60 | 4 | 580x580 |
| GMPL.6060.36.40 | 36 | 4000 | 3545 | >80 | 220 - 240 / 50 - 60 | 4 | 580x580 |
| GMPL.6060.28.30 | 28 | 3000 | 2550 | >80 | 220 - 240 / 50 - 60 | 4 | 580x580 |
| GMPL.6060.28.40 | 28 | 4000 | 2750 | >80 | 220 - 240 / 50 - 60 | 4 | 580x580 |

