




## G 3012 EPM

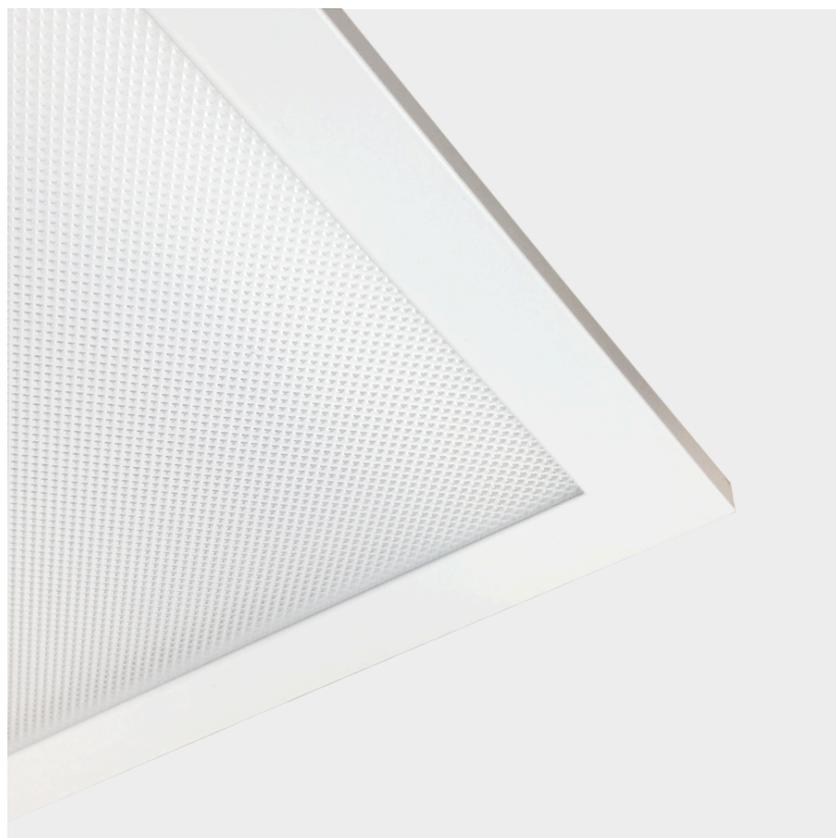

### Housing

Aluminium profile frame, steel back cover with electrostatic powder coating

### Optics

PS microprism louvre, PMMA LGP diffuser (UGR<19)

### Led

High-efficiency LED with CRI>80, achieving L90B50  $\geq$  50,000 hours of lifetime.

### Driver

Constant current output LED driver with high efficiency, Pf  $\geq$  0.95

### Installation

For T-bar ceiling only (15 or 24 mm)



Ral 9016

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	Weight (Kg)
GEPM.3012.20.40	20	4000	2170	>80	220 - 240 / 50 - 60	3,48
GEPM.3012.20.30	20	3000	2060	>80	220 - 240 / 50 - 60	3,48
GEPM.3012.27.40	27	4000	3040	>80	220 - 240 / 50 - 60	3,48
GEPM.3012.27.30	27	3000	2780	>80	220 - 240 / 50 - 60	3,48
GEPM.3012.36.40	36	4000	3530	>80	220 - 240 / 50 - 60	3,48
GEPM.3012.36.30	36	3000	3450	>80	220 - 240 / 50 - 60	3,48
GEPMP.3012.19.40	19	4000	2410	>80	220 - 240 / 50 - 60	3,42
GEPMP.3012.19.30	19	3000	2150	>80	220 - 240 / 50 - 60	3,48
GEPMP.3012.27.40	27	4000	3350	>80	220 - 240 / 50 - 60	3,48
GEPMP.3012.27.30	27	3000	3000	>80	220 - 240 / 50 - 60	3,48
GEPMP.3012.30.40	30	4000	3680	>80	220 - 240 / 50 - 60	3,48
GEPMP.3012.30.30	30	3000	3410	>80	220 - 240 / 50 - 60	3,48

