
# SD 5050 YGA

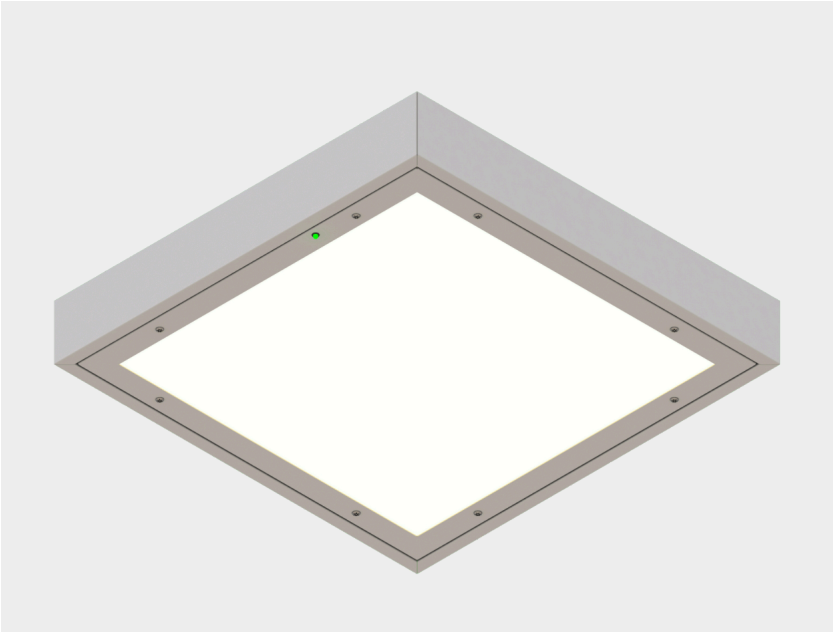

**Body**
Electrostatic powder coated DKP body.

**Diffuser**
Special type, opal diffuser and 5mm thick transparent polycarbonate diffuser with homogeneous light distribution and high light transmission.

**Protection**
High security bolt system to prevent access to the luminaire.


**Led**
High-efficacy LED module with 50,000 hours of lifetime according to L90B50.


**Driver**
Constant current output. High efficiency pf≥0.95 with system.

**YOU CAN GET DETAILED INFORMATION FROM OUR COMPANY ABOUT THIS PRODUCT.**

Ral 9016

| Type Code | Power (w) | CCT (K) | Light Output (lm) | CRI | V/Hz | Weight (Kg) | Cut-out Size (mm) |
|---|---|---|---|---|---|---|---|
| SD5050YGA.56.30 | 56 | 3000 | 3870 | >80 | 220 - 240 / 50 - 60 | 7,2 | 350x420 |
| SD5050YGA.56.40 | 56 | 4000 | 4154 | 80 | 220 - 240 / 50 - 60 | 7,2 | 320x420 |

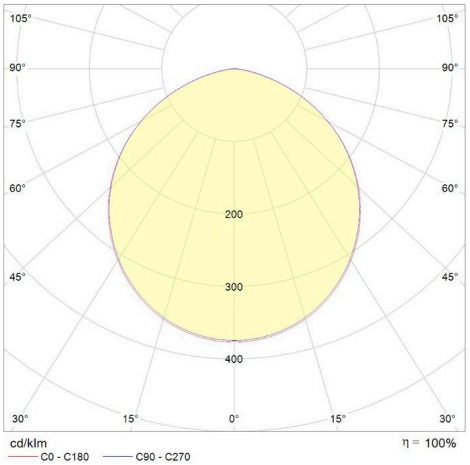

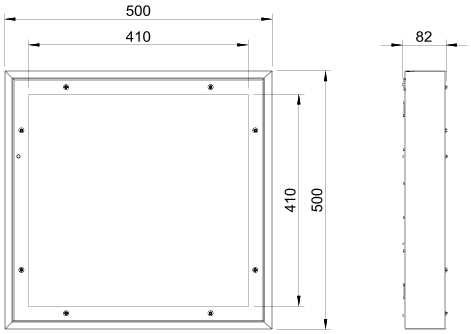
500
410
410
500
82