




CVU Series

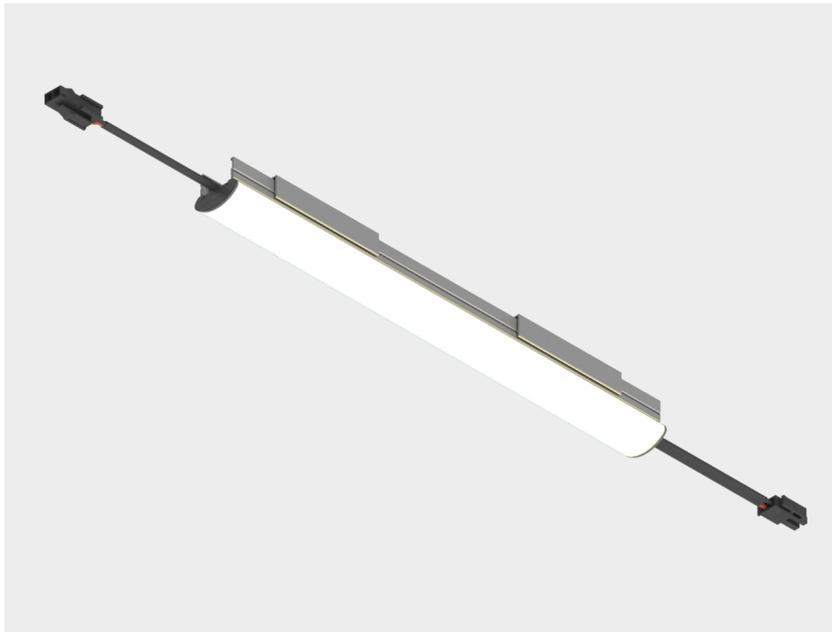

Body

Matte natural anodized, aluminum extrusion profile and steel mounting accessory, aluminum end caps.

Diffuser

Opal white polycarbonate diffuser providing homogeneous light distribution.

LED

Mid power led with 50.000 hours lifetime, high efficacy factor and color rendering.

Driver

24V external type. High efficiency LED driver with constant current output system.



*Andz.

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	Weight (Kg)	Cut-out Size (mm)
SD0250CVU.05.30	5	3000	320	>80	220 - 240 / 50 - 60	0,1	250
SD0500CVU.10.30	10	3000	640	80	220 - 240 / 50 - 60	0,2	500
SD1000CVU.20.30	20	3000	1250	>80	220 - 240 / 50 - 60	0,4	1000
SD1250CVU.25.30	25	3000	1250	>80	220 - 240 / 50 - 60	0,5	1250
SD1750CVU.35.30	35	3000	2250	>80	220 - 240 / 50 - 60	0,7	1750
SD2000CVU.42.30	42	3000	2550	>80	220 - 240 / 50 - 60	0,8	2000

