




GIA

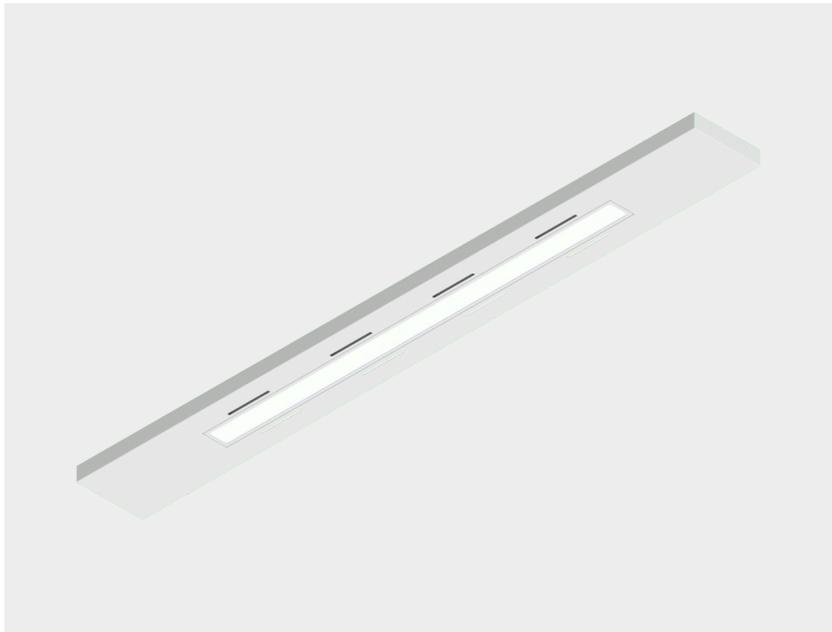

Body

Electrostatic powder coated DKP sheet.

Diffuser

Optical lens with UGR <19, anti-glare and homogeneous light distribution.

Opal whitesand diffuser with high light transmission.

Led

Mid power with high efficacy factor and color rendering, L90B50 \geq 50,000 hours.

Driver

Constant current output, high efficiency, Pf \geq 0.95.

Options

- * 1 or 3 hours emergency lighting module
- * Can be dimmed via DALI
- * Sensor can be added.



Ral 9016 Ral 9005 Ral 9006

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	Weight (Kg)	L1 (mm)	L2 (mm)
G3017GIA.22.40	22	4000	3100	80	220 - 240 / 50 - 60	5,9	1720	297
G1217GIA.22.40	22	4000	3100	80	220 - 240 / 50 - 60	4,1	1720	115
G1917GIA.22.40	22	4000	3100	80	220 - 240 / 50 - 60	4,8	1720	185

